



EVERBRIGHT LIMITED

EVERBRIGHT ~~W~~ HIGH POWER LED

Model : EV-H~~W~~ERW-2

Company Name: _____

Confirmed By _____

DATE: _____

Hongkong Everbright Science & Technology Co.,Ltd

HK Office: 1609-12A Nan Fung Tower., 173 Des Voeux Road C.SHEUNG WAN, Hong Kong.

Shenzhen Office: Rm1002 U2, B Building Sun,Buxin Jindaotian Rd,Shenzhen city,China

Tel: +86 755-25815171 250968

Fax: +86 755-25815171

Website: www.everbright-led.com

Email: everbright-led@163.com




EVERBRIGHT LIMITED

Description

- ◆ Viewing angle: 120 deg
- ◆ The materials of the LED dice is InGaN/GaN
- ◆ 14.5mm×8.0mm×6.05mm power-LED
- ◆ RoHS compliant lead-free soldering compatible



Package Outline

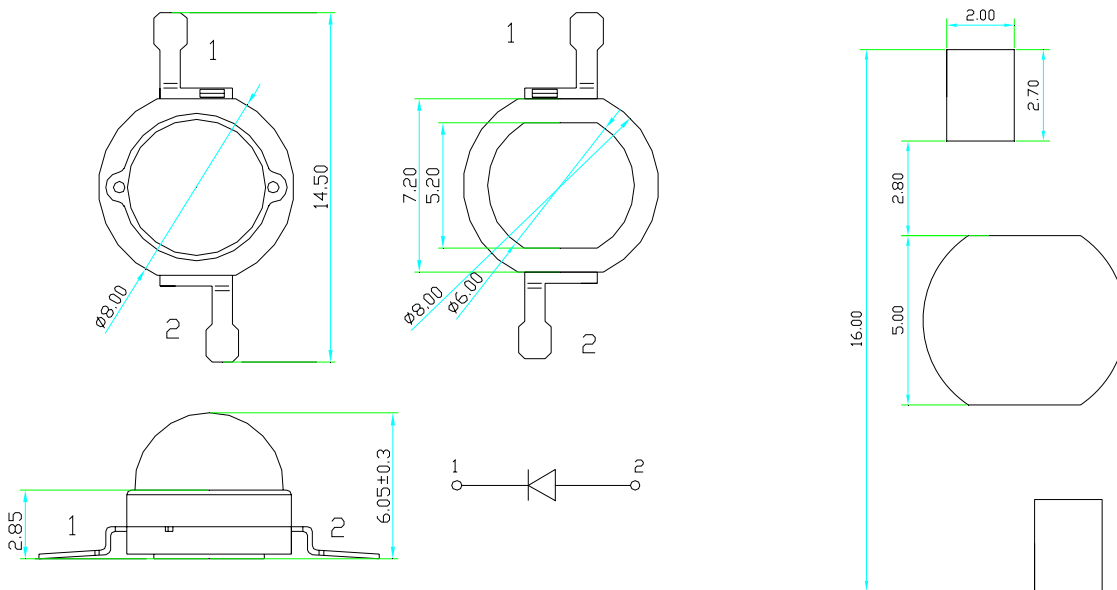

ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
SENSITIVE DEVICES

NOTES:

1. All dimensions are in millimeters (inches);
2. Tolerances are ± 0.3 mm (0.012inch) unless otherwise noted.

Absolute maximum ratings at Ta=25°C

Parameter	Symbol	Value	Unit
Power dissipation	Pd	1400	mW
Forward DC current	If	350	mA
Reverse DC voltage	Vr	5	V
Operating temperature range	Top	-40 ~+100	°C
Storage temperature range	Tstg	-40~+100	°C
Peak pulsing current	Ifp	1000	mA


Electro-optical characteristics at Ta=25°C

Parameter	Test Condition	Symbol	Value			Unit
			Min.	Typ.	Max.	
Forward voltage	If=350mA	Vf	3.0	--	4.0	V
Luminous intensity	If=350mA	Ø	40	--	60	lm
	If=350mA	Ø	60	--	80	lm
	If=350mA	Ø	80	--	100	lm
Reverse current	Vr=5V	Ir	--	--	50	µA
Chromaticity	If=350mA	A	(0.2610,0.2293)(0.2468,0.2361) (0.2654,0.2741)(0.2800,0.2670)			
		B	(0.2800,0.2670)(0.2654,0.2741) (0.2810,0.3009)(0.2950,0.2941)			
		K	(0.2950,0.2941)(0.2899,0.2967) (0.3168,0.3358)(0.3224,0.3341)			
		L	(0.2899,0.2967)(0.2810,0.3009) (0.3070,0.3389)(0.3168,0.3358)			


NOTE: (Tolerance: Ø ±10%, X/Y ±0.01, Vf ±0.1V)
IFP Conditions : Pulse Width ≤ 10msec. and Duty ≤ 1/10.

Optical characteristics curves


Spectral Distribution

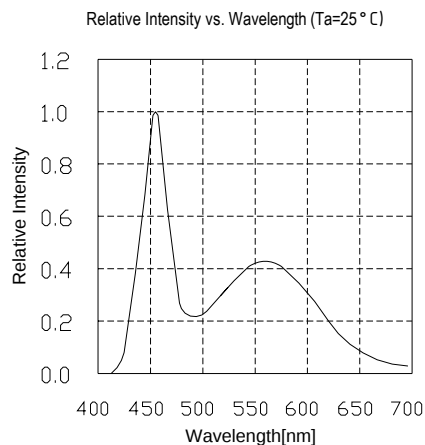


Forward Voltage vs. Forward Current (Ta=25 °C)

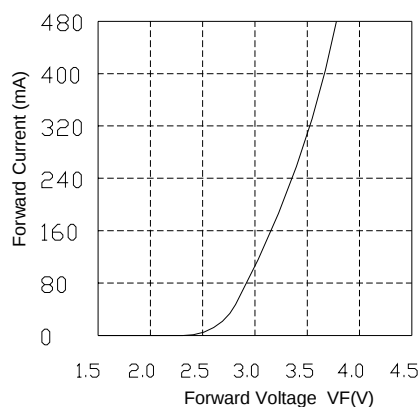


Relative Intensity vs. Forward Current (Ta=25 °C)

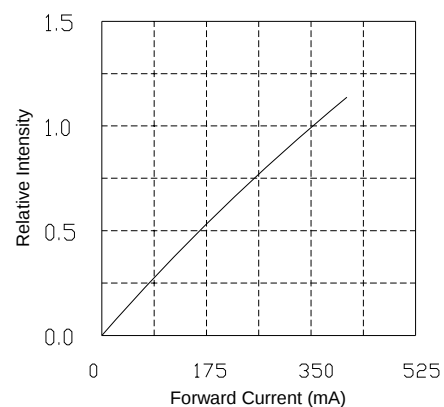

Derating

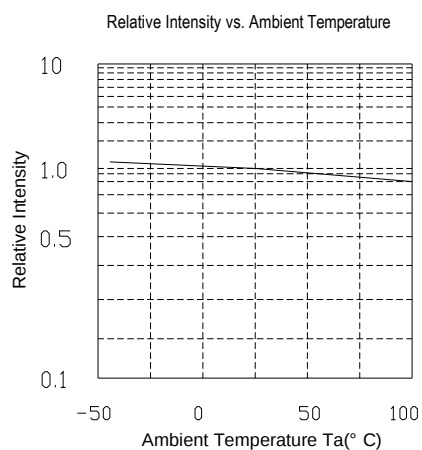

Ambient Temperature vs. Maximum Forward Current

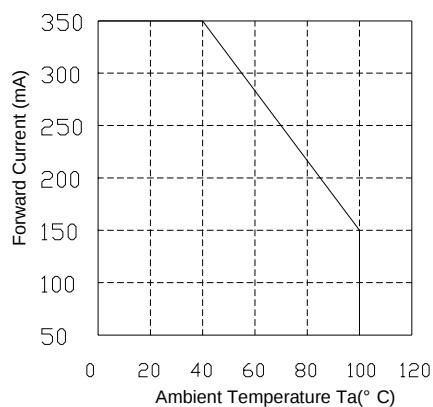

Forward Current vs. Chromaticity (Ta=25 °C)


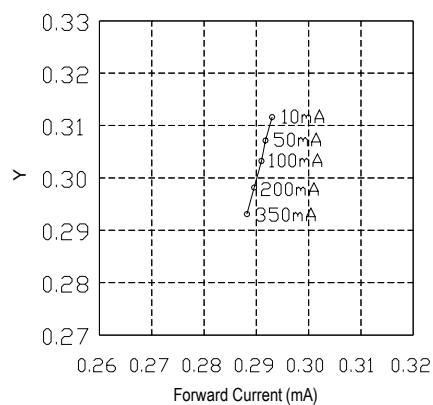


Diagram characteristics of radiation

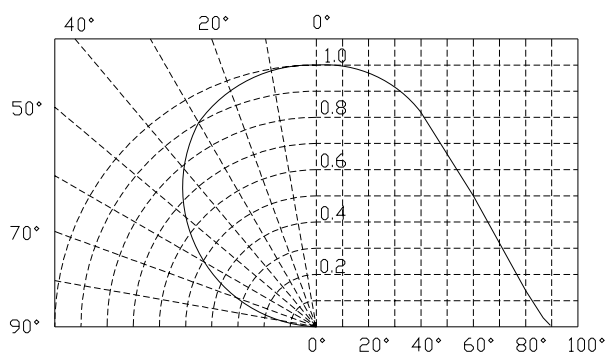

Reliability

(1)TEST ITEMS AND RESULTS

Type	Test Item	Ref. Standard	Test Conditions	Note	Number of Damaged
Environmental Sequence	Resistance to Soldering Heat(Reflow Soldering)	JESD22-B106	Tsld=260℃,10sec	2 times	0/22
	Temperature Cycle	JESD22-A104	-40℃ 30min ↑↓5min 100℃ 30min	1000 cycle	0/100
	Thermal Shock	JESD22-A106	-40℃ 15min ↑↓ 100℃ 15min	1000 cycle	0/100
	High Temperature Storage	JESD22-A103	T _a =100℃	1000 hrs	0/100
	Low Temperature Storage	JESD22-A119	T _a =-40℃	1000 hrs	0/100
	Power temperature cycling	JESD22-A105	On 5min -40℃>15min ↑↓ ↑↓<15min Off5min 100℃>15min	100 cycle	0/100
Operation Sequence	Life Test	JESD22-A108	T _a =25℃ I _F =400mA	1000 hrs	0/100
	High Humidity Heat Life Test	JESD22-A101	60℃ RH=90% I _F =350mA	1000 hrs	0/100

(2)CRITERIA FOR JUDGING THE DAMAGE


Item	Symbol	Test Conditions	Criteria for Judgement	
			Min.	Max.
Forward Voltage	V _F	I _F =175mA	—	U.S.L*)×1.1
Reverse Current	I _R	V _R =5V	—	U.S.L*)×2.0
Luminous flux	Φ	I _F =175mA.	L.S.L**)×0.7	—

U.S.L.: Upper Standard Level


L.S.L.: Lower Standard Level

Packaging Specifications

• Feeding Direction

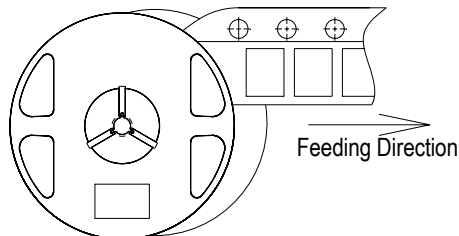


• Dimensions of Reel (Unit: mm)

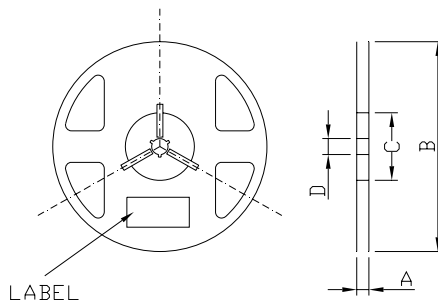


A	$24.5 \pm 0.1 \text{ mm}$
B	$330 \pm 1 \text{ mm}$
C	$110 \pm 1 \text{ mm}$
D	$13.0 \pm 0.5 \text{ mm}$

• Dimensions of Tape (Unit: mm)

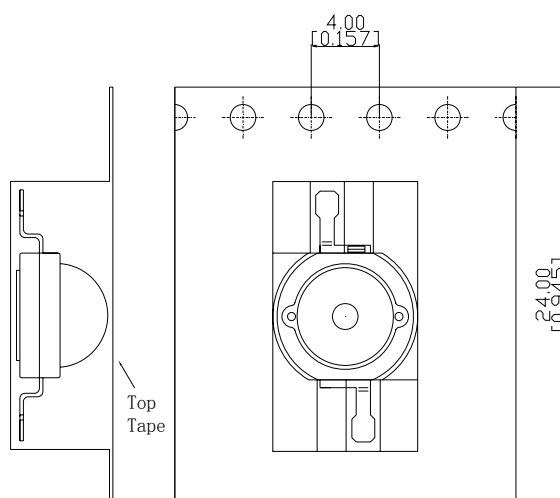

• Arrangement of Tape

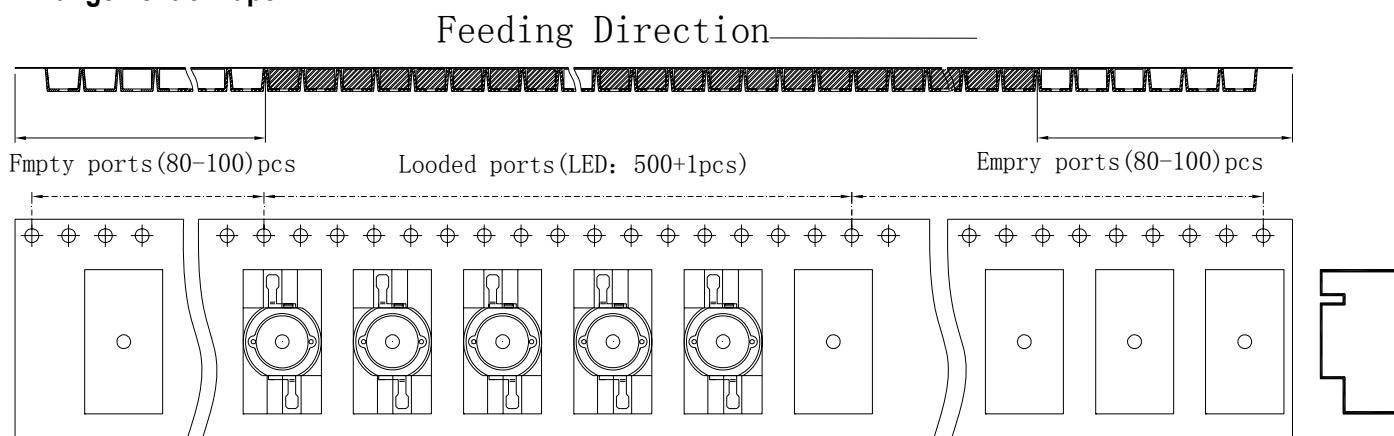

NOTES

1. Empty component pockets are sealed with top cover tape;
2. The maximum number of missing lamps is two;
3. The cathode is oriented towards the tape sprocket hole in accordance with ANSI/EIA RS-481 specifications.
4. 500 pcs/ Reel.